



divesoft.cz

Liberty

Fault-tolerant

- 4 oxygen sensors
- 2 helium sensors
- 2 methods of pO_2 measuring
- 2 independent computers
- 2 solenoid valves
- 4 displays


No single malfunction in the electronic system can cause a breakdown of the whole apparatus.

Rebreather was constructed with maximum operating depth 300 m in mind. Every part is tested to 600 m. EC Type-examination was performed to 100 m simulated depth.

CE Certified

The CCR Liberty is the first rebreather in the world that is certified according to EN 14143:2013 without any exceptions or exclusions.



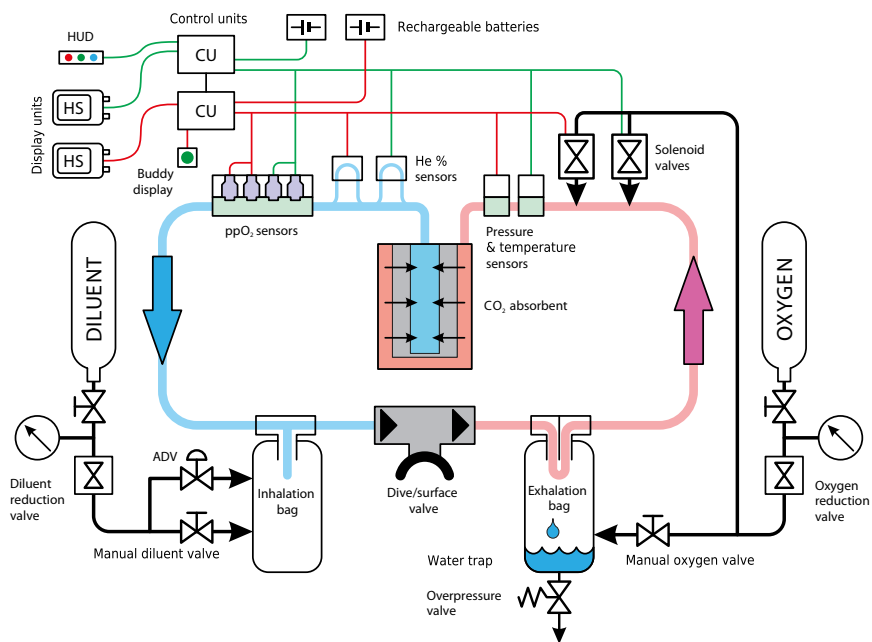



Divesoft s.r.o.

Hálkova 2495
413 01 Roudnice nad Labem
Czech Republic

+420 416 857 057
info@divesoft.cz
www.divesoft.cz

Divesoft, LLC

7850 Ulmerton Rd., Suite 3B
Largo, Florida 33771
USA

+1 (813) 389 7911
info@divesoftus.com
www.divesoftus.com